

4

3



2

1

THIS DRAWING UNPUBLISHED.	RELEASED FOR PUBUCATION
---------------------------	-------------------------

LOC	DIST	REVISIONS					
---	---	P	LTR	---	DATE	DWN	APVD
---	---	---	---	---	---	---	---

D

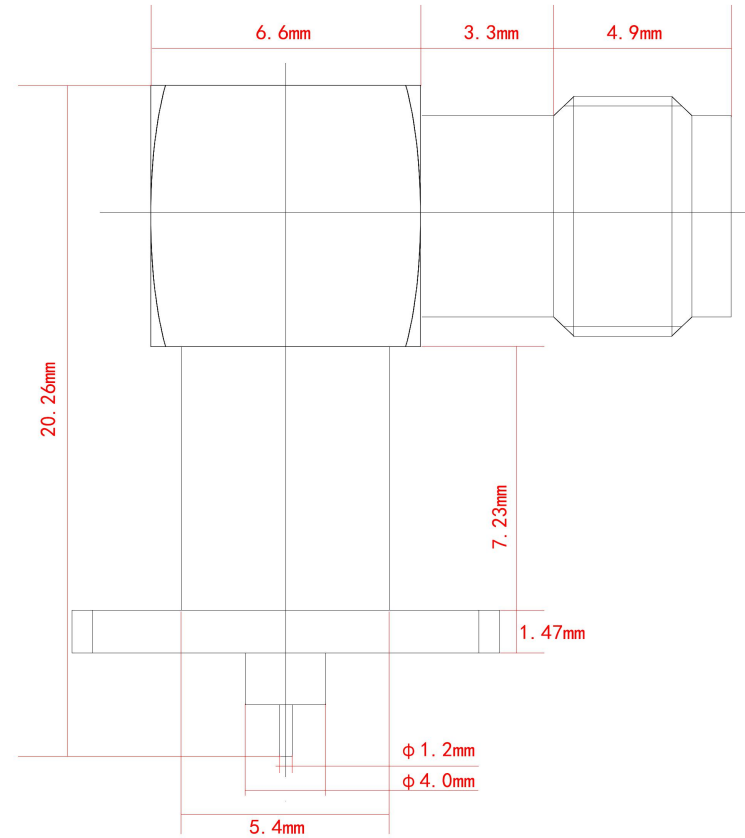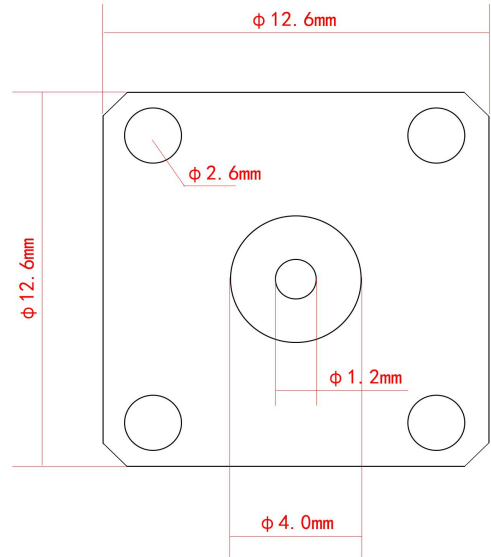

D

C

C

- NOTES:
- ELECTRICAL:
 - IMPEDANCE: 50Ω
 - INSULATION RESISTANCE: 5000M Ω
 - FREQUENCY RANGE: DC-6 GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
 - VSWR: ≤1.20:1
 - INSERTION LOSS: 0.25dB (MAX)
 - ENVIRONMENTAL:
 - TEMPERATURE RANGE: -55° to +125°
 - MATERIAL AND FINISH:
 - INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE SILVER PLATING
 - INSULATOR: PTFE
 - EXTERNAL CONDUCTOR MATERIAL: BRASS TERNARY ALLOY

B

B

Accept custom sizes and styles

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021	 Shenzhen xinqiyuan Technology Co., Ltd.	
		CHK		
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.1	NAME	SMA Female RF Coaxial Connector Dielectric through
		Note: Dimensions (mm / [inch])	APPLICATION SPEC	
		WEIGHT	SIZE	A4
			CAGE CODE	01021
			DRAWING NO	XQY-SMAKWHD-3SB

4

3

2

1